


**CAPSULE TRANSPORTATION METHOD AND DEVICE**

**Patent number:** JP11116051  
**Publication date:** 1999-04-27  
**Inventor:** FUJISAWA TOMOJI; ISHIZUKA HITOSHI  
**Applicant:** NKK CORP  
**Classification:**  
- **International:** B65G51/04; B65G54/02  
- **European:**  
**Application number:** JP19970277614 19971009  
**Priority number(s):**

**Abstract of JP11116051**

**PROBLEM TO BE SOLVED:** To allow travelling of a capsule without requiring large scale power facilities for placed with great inclinations and small radii of curvature, simplify air pressure means in a booster station for less trouble and reduce a construction cost for more application.

**SOLUTION:** A capsule 3 in which cargoes are loaded travels in a pipe in a pipe line 1 connecting plural points for transportation. The capsule 3 in which permanent magnets are annularly arranged at preset spaces is used to be air-transported with air force supplied from a blower 8 in underground sections, where the pipe line is embedded. In the inclined or curved sections of the pipe line, in a load-up and -down station and in a booster station, linear tubes 5 are used and air force and electromagnetic driving force in a linear motor system are both used to transport the capsule 3.

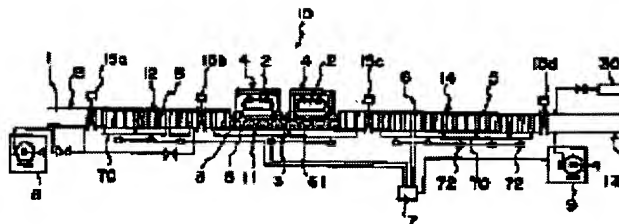

Data supplied from the esp@cenet database - Patent Abstracts of Japan